OA92

Installation Manual

Tools require

Pencil

(∅6、∅3.2)bit drill



Silicone gun



Flat and cross screwdriver



Tap measure

Level ruler



Drill machine

Spanner



Rubber hammer

Spare parts



① X6



② X6



③ X1



④ X4



⑤ X1



⑥ X1



⑦ X4

Product schematic diagram

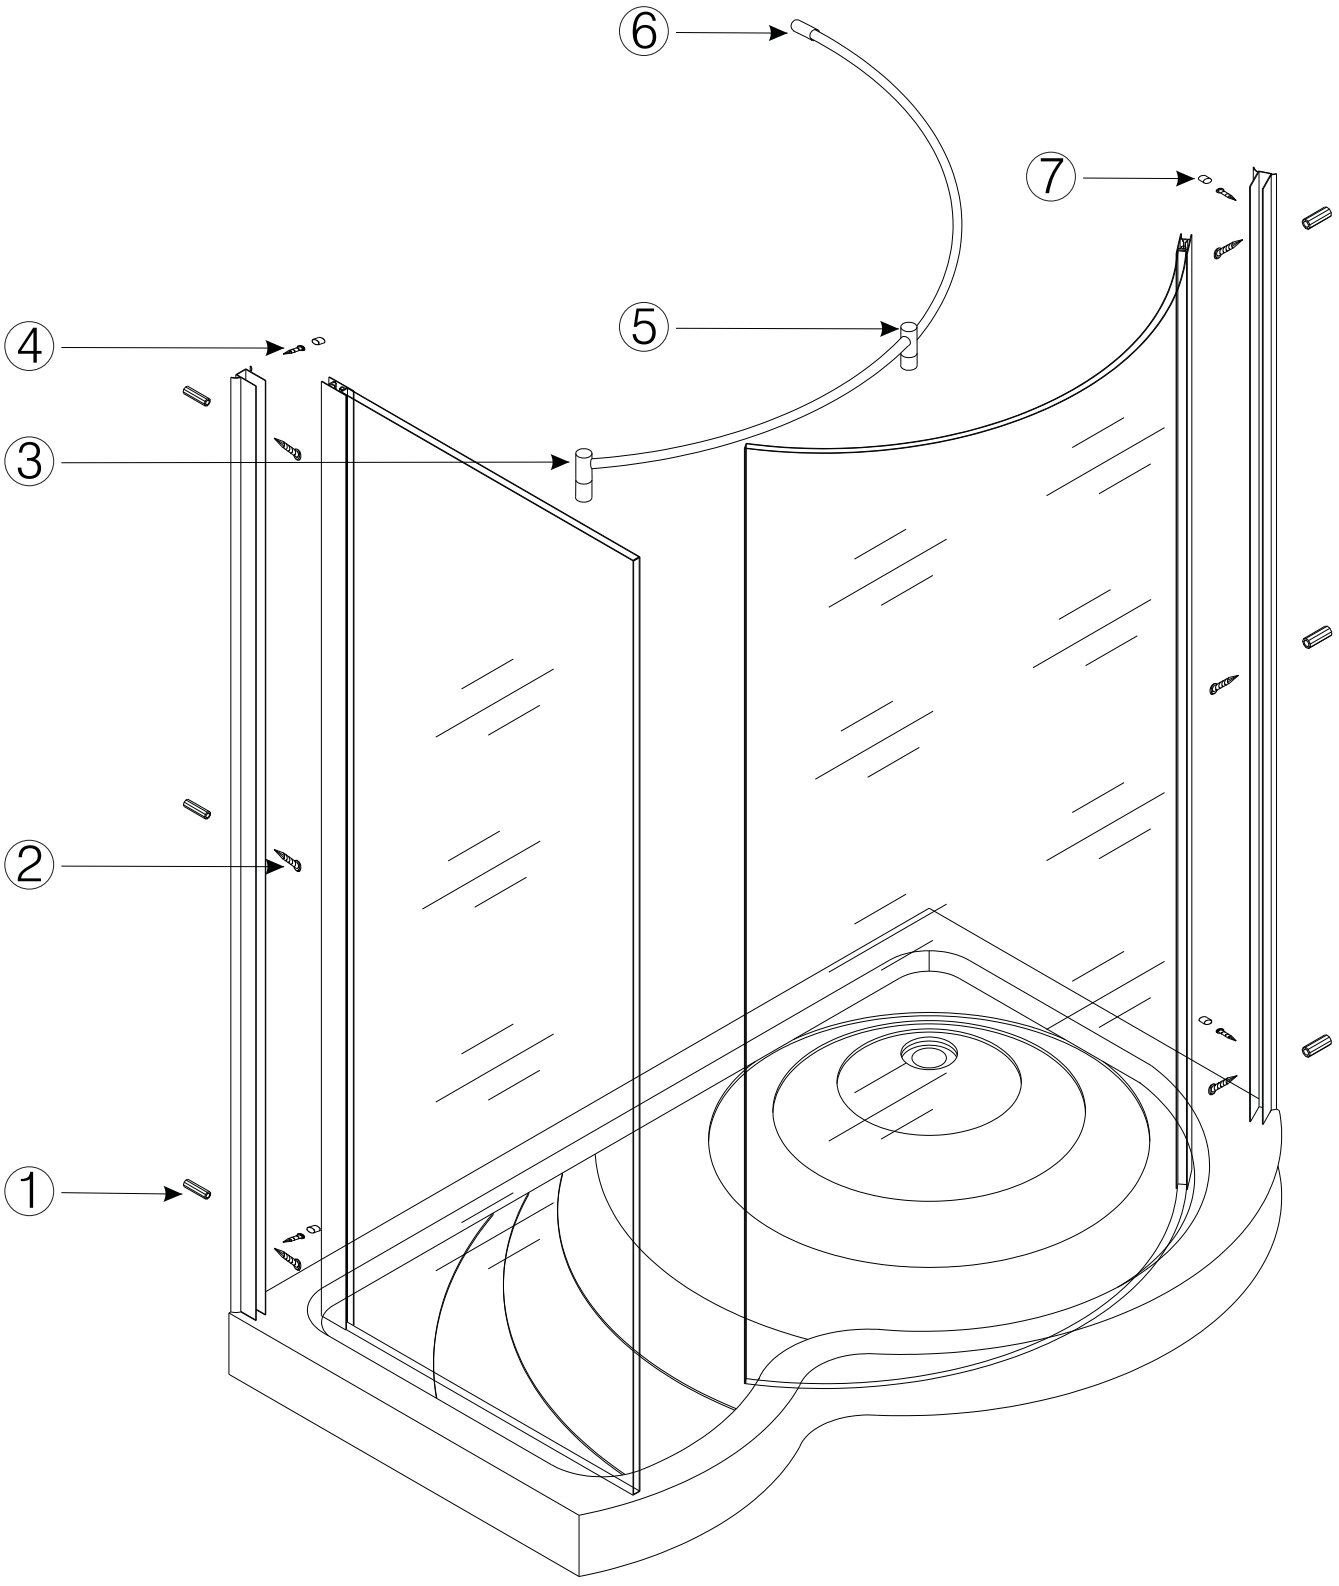

1

A

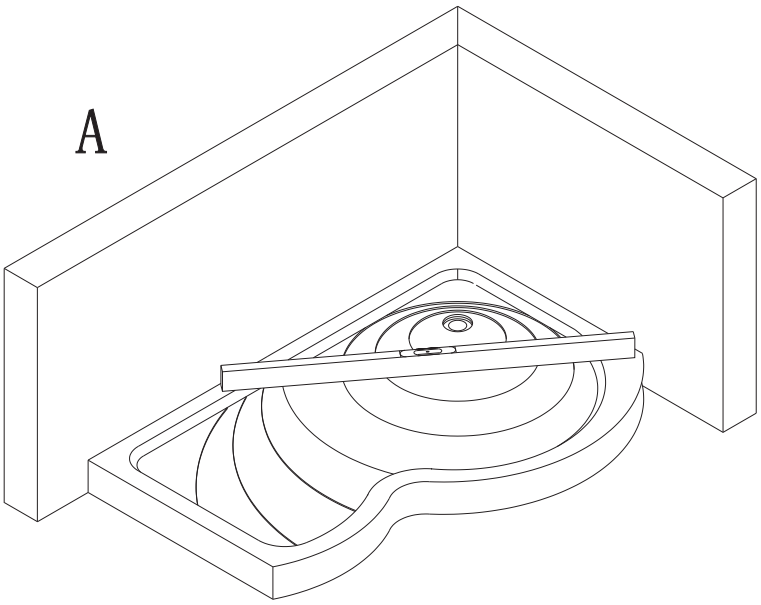

B

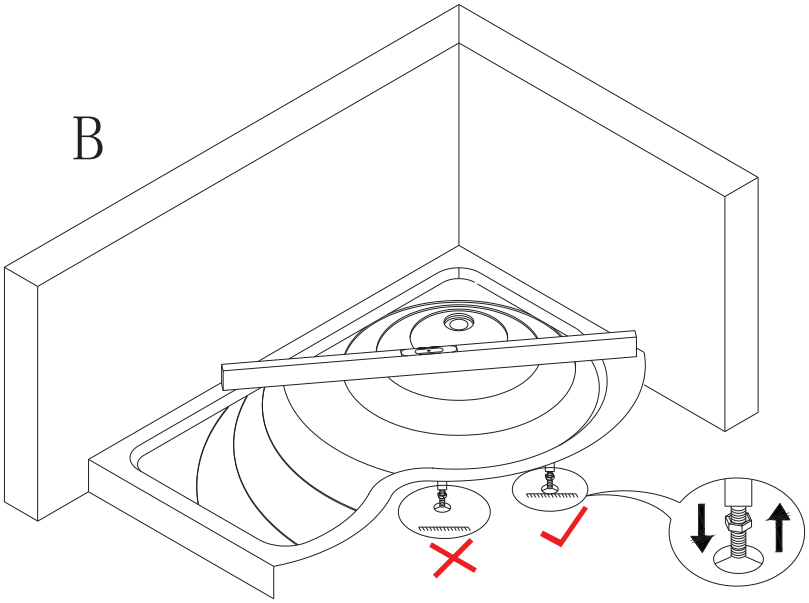

While measuring the level of the tray, you can make it level by adjusting the leg, when all the legs are leveled, please screw the screw nut tightly, refer to the upper pictures.

C

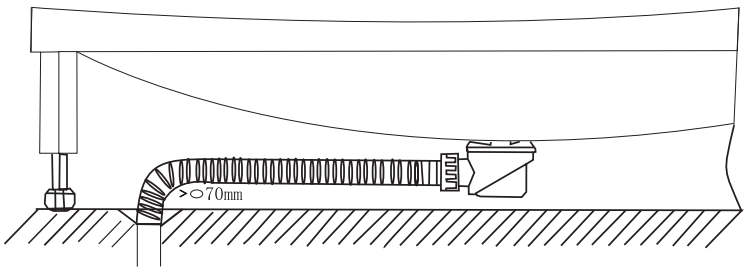

2

A

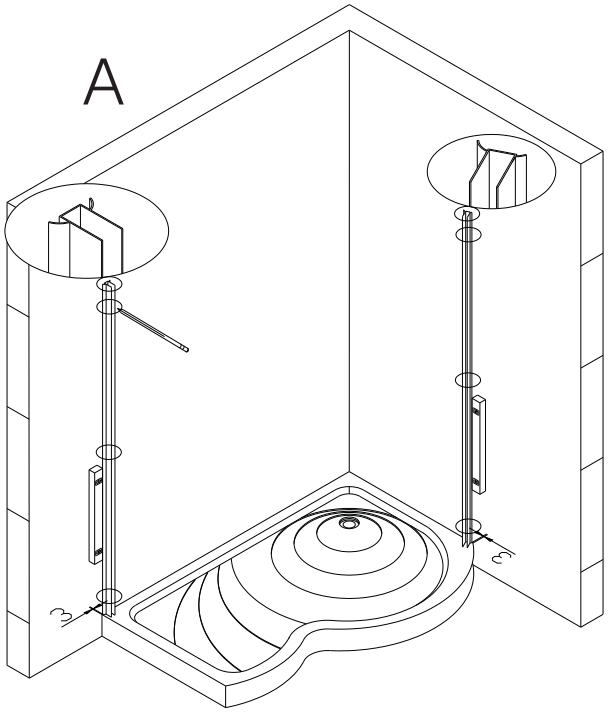

B

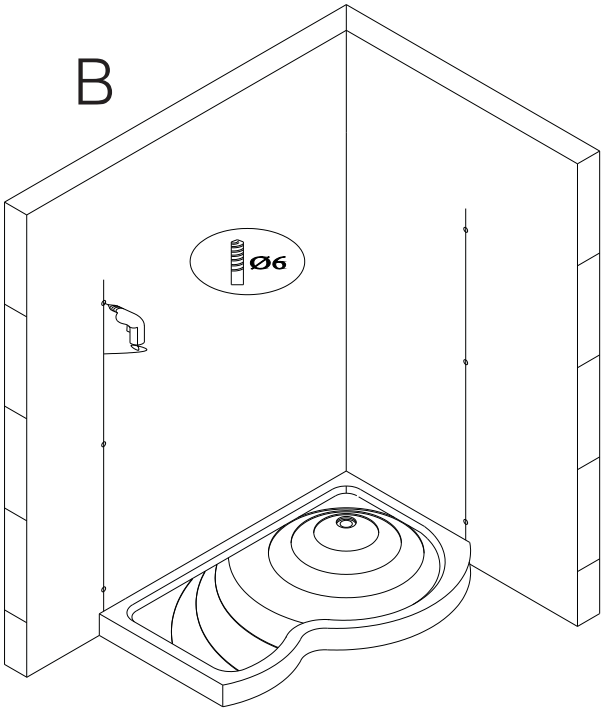

C

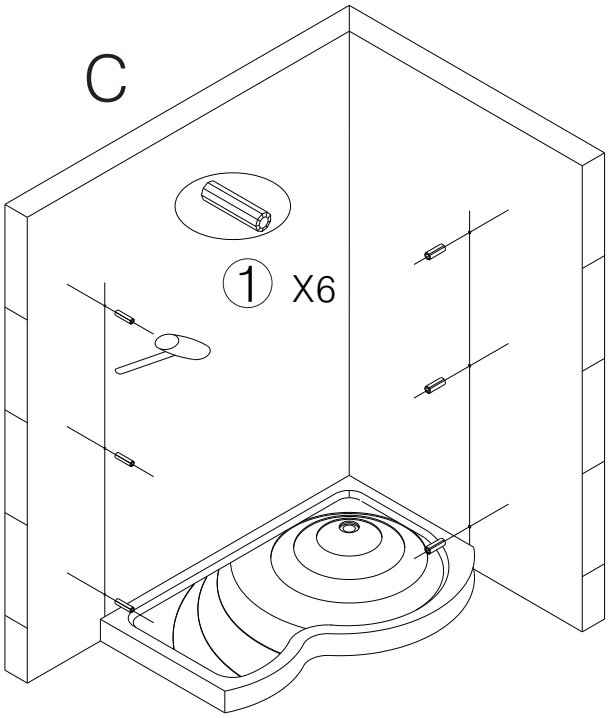

D

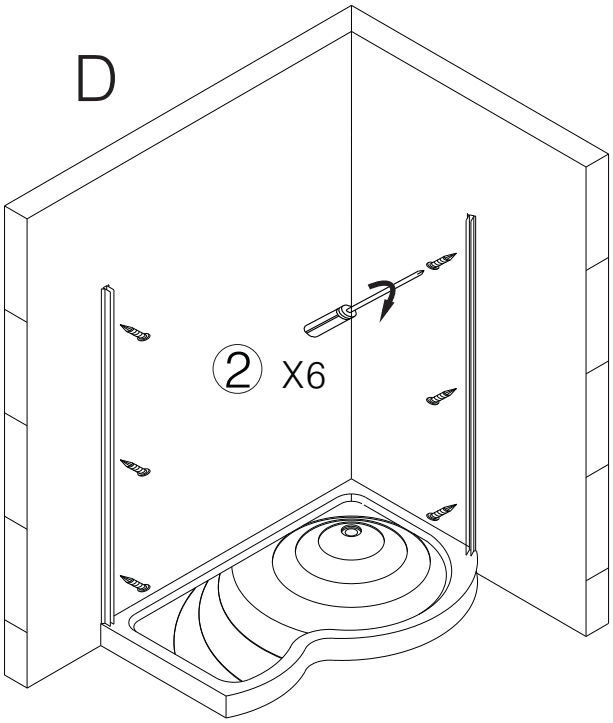

3

A

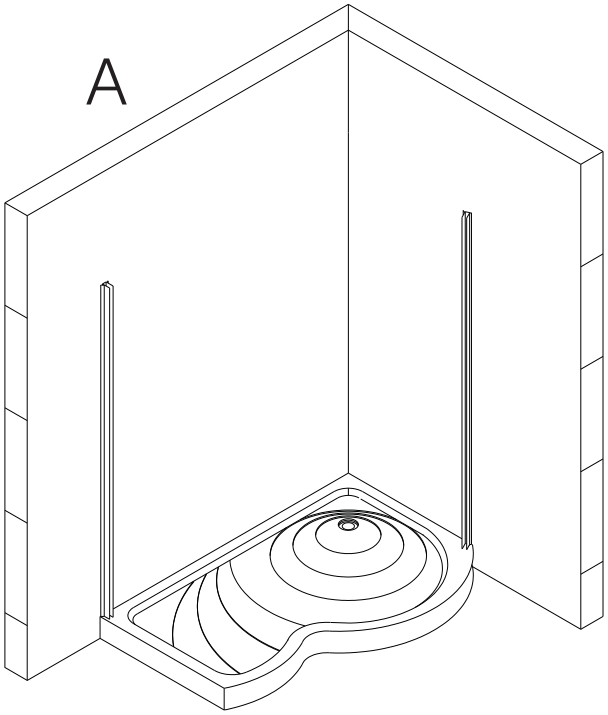

B

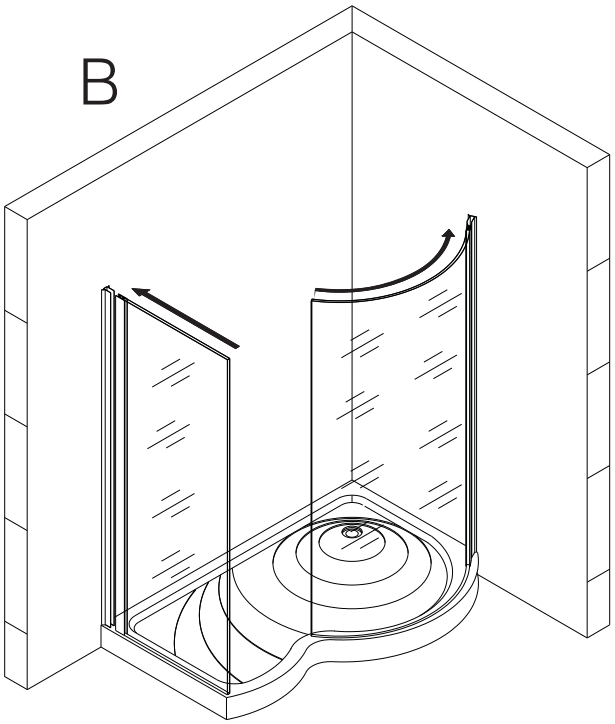

C

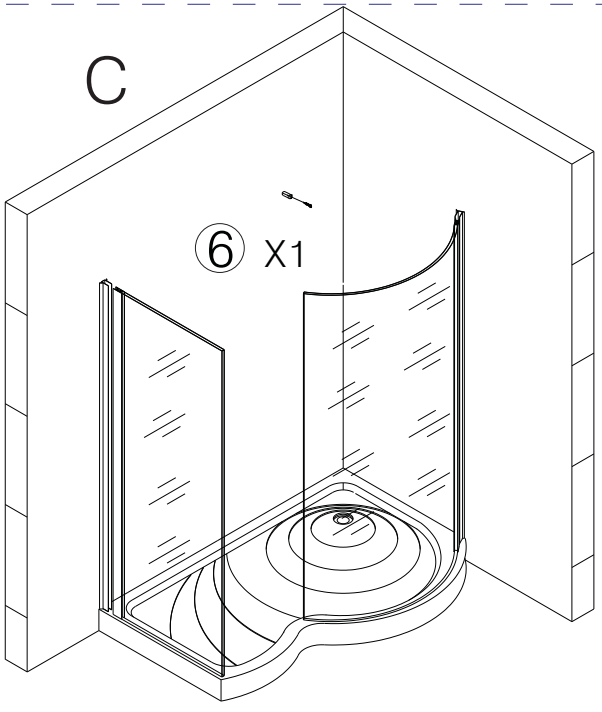

D

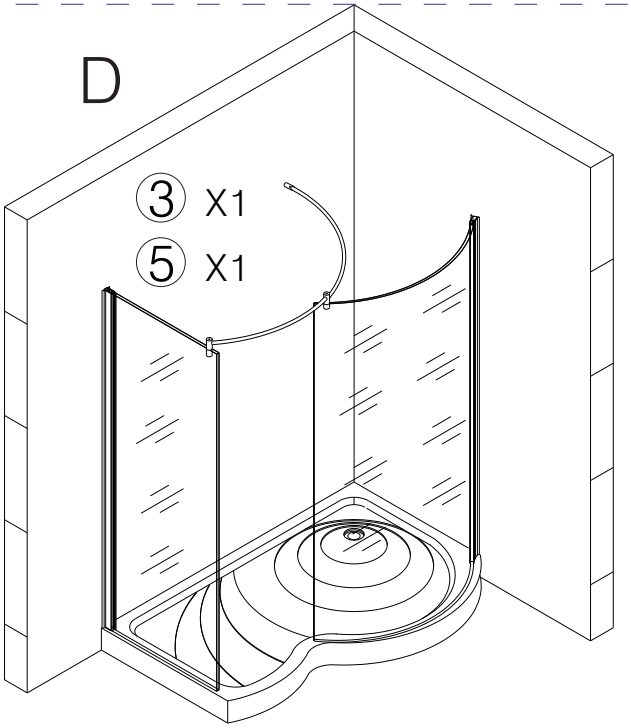

E

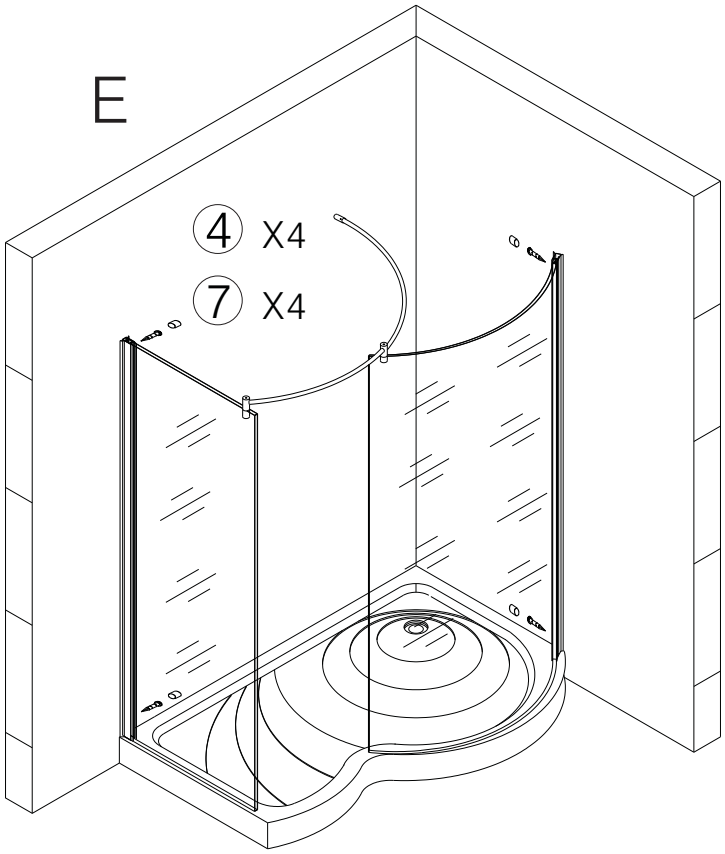

F

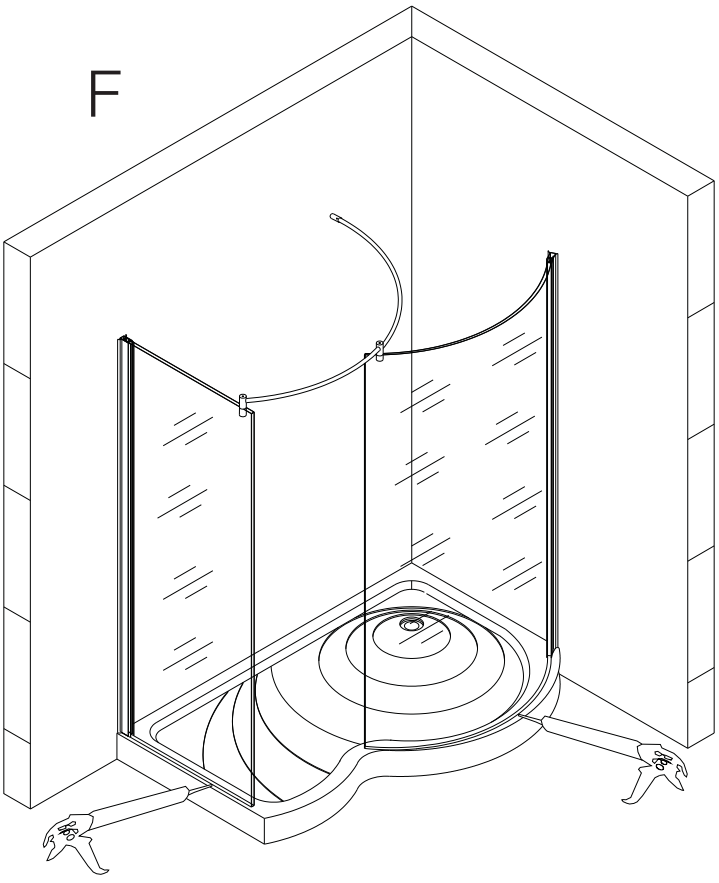

Cleaning & Maintenance

Clean the sundries regularly to prevent the drain from being jammed. Usually, clean the shower enclosure by mop with mild detergent.

Don't clean the shower enclosure with irritant detergent, such as alcohol, gasoline or other chemical cleaner.

Should there be any dirty stains on the shower enclosure,you may clean it by calico with toothpaste,but you need to clean it with water afterwards.

After the installation is completed, if you find there is much noise when the glass door moves, you may add small quantity of lubricant onto the roller wheel, slipping hook and the track.